

W

ZK2200- FAST RECOVERY DIODE


4000-4500V_{RRM}

FAST RECOVERY RECTIFIER DIODE

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 4500 volts
- . Soft recovery
- . Ceramic housing hermetic package
- . Pressure assembled device

D13C

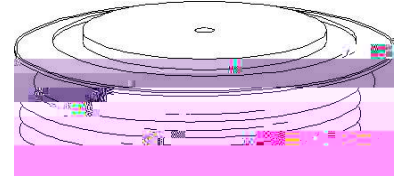

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} = Repetitive peak reverse voltage

V_{RSM} = Non repetitive peak reverse voltage (2)

--	--	--	--	--

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
-----------	--------	------	------	------	-------	------------

I_{FM} = 1000 A

